




The digital control for all automated operators

- Backlit with blue light, available in the surface-mounted or recess-mounted version.
- RAL7024 gray cover.
- 12-key keypad for extra security.
- Transponder selector for Manchester-type cards and keyfobs.
- Bluetooth selector with CAME AUTOMATIONBT APP free for IOS and Android.
- Compatible with CAME Key.



Dimensions (mm)

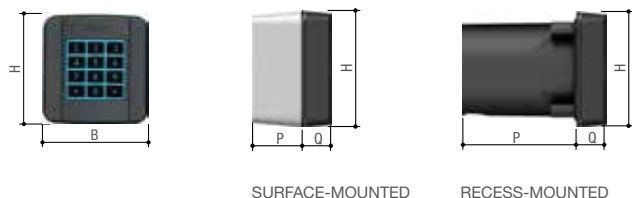

SURFACE-MOUNTED

RECESS-MOUNTED

Dimensions table (mm)

Models	Type	Mounting	B (mm)	H (mm)	P (mm)	Q (mm)	P + Q (mm)
806SL-0170	Radio-frequency keypad	Surface mounted	70.5	73.5	33.5	16.5	50
806SL-0180	Radio-frequency keypad	Surface mounted	70.5	73.5	33.5	16.5	50
806SL-0150	Hardwired keypad	Surface mounted	70.5	73.5	33.5	16.5	50
806SL-0160	Hardwired keypad	Recess mounted	70.5	73.5	76	16.5	92.5
806SL-0110	Transponder	Surface mounted	70.5	73.5	33.5	16.5	50
806SL-0120	Transponder	Recess mounted	70.5	73.5	76	16.5	92.5
806SL-0210	Bluetooth	Recessed	70,5	73,5	33,5	16,5	50
806SL-0240	Bluetooth	Recessed	70,5	73,5	33,5	16,5	50
806SL-0250	Bluetooth	Recessed	70,5	73,5	33,5	16,5	50

Technical characteristics

MODELS	806SL-0170	806SL-0180	806SL-0150	806SL-0160	806SL-0110	806SL-0120	806SL-0210	806SL-0240	806SL-0250
Protection rating (IP)	54	54	54	54	54	44	54	54	54
Power supply (V)	-	-	-	-	-	-	12 - 24 AC - DC	12 - 24 AC - DC	12 - 24 AC - DC
Power (W)	0,144	0,144	0,6	0,6	0,83	0,83	0,7	0,7	0,7
Max. rating of 24 V (A) relay contacts	-	-	-	-	-	-	1	1	1
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20° ÷ +55°	-20° ÷ +55°	-20° ÷ +55°

● 12 - 24 V AC - DC

Code	Description
433.92 MHz keypad radio selectors	
806SL-0170 	SELT1W4G - 433.92 MHz surface-mounted, 12-key radio keypad selector, with blue backlight, 25 savable codes and password to access the programming mode. Settable in Rolling Code or Fixed Code mode. RAL7024 Gray color.
868.35 MHz keypad radio selectors	
806SL-0180 	SELT1W8G - 868.35 MHz surface-mounted, 12-key radio keypad selector, with blue backlight, 25 savable codes and password to access the programming mode. Settable in Rolling Code or Fixed Code mode. RAL7024 Gray color.
Bluetooth digital selectors	
806SL-0210 	SELB1SDG1 - Surface-mounted Bluetooth selector for 15 users with blue backlighting. RAL7024 Gray color.
806SL-0240 	SELB1SDG2 - Surface-mounted Bluetooth selector for 50 users with blue backlighting. RAL7024 Gray color.
806SL-0250 	SELB1SDG3 - Surface-mounted Bluetooth selector for 250 users with blue backlighting. RAL7024 Gray color.
Transponder sensors	
806SL-0110	SELR1NDG - Surface-mounted transponder selector for cards, keyfobs and TAG (Manchester protocol) with blue backlighting. RAL7024 Gray color.
806SL-0120	SELR2NDG - Recess-mounted transponder selector for cards, keyfobs and TAG (Manchester protocol) with blue backlighting. RAL7024 Gray color.
Keypad selectors	
806SL-0150	SELT1NDG - Surface-mounted keypad selector, with 12 keys and backlighting. RAL7024 Gray color.
806SL-0160	SELT2NDG - Recess-mounted keypad selector, with 12 keys and backlighting. RAL7024 Gray color.
24 V AC - DC magnetic sensors	
009SMA 	Single.-channel magnetic sensor for detecting metal masses.
009SMA2 	Two-channel magnetic sensor for detecting metal masses.
230 V AC magnetic sensors	
009SMA220	Single.-channel magnetic sensor for detecting metal masses.









DOWNLOAD the CAME AutomationBT APP



AutomationBT is CAME's new app for Bluetooth selectors that lets you control your automated operators via smartphone. Activate the location service, receive alerts and open the gate. The Keyless function lets you even do it automatically.

THE COMPLETE RANGE

Code	Description
Snap-in 433.92 MHz Rolling Code receivers for: 806SL-0170	
001 AF43S	Plug-in radio-frequency control card
Snap-in 433.92 MHz Rolling Code receivers for: 806SL-0170	
001 AF43SR	Plug-in radio-frequency circuit board for max. 25 transmitters.
Snap-in 868.35 MHz receivers for: 806SL-0180	
001 AF868	Plug-in radio-frequency control card
Snap-in 868.35 MHz Rolling code receivers for: 806SL-0180	
001 AF868SR	Plug-in radio-frequency circuit board for max. 25 transmitters.
External 12 - 24 V AC - DC 433.92 MHz radio receivers for: 806SL-0170	
001 RE432M 	Two-channel, external IP54 12 - 24 V AC - DC receiver for saving up to 50 different user codes, with TOP, TAM, ATOMO D and TWIN coding.
External 12 - 24 V AC - DC 868.35 MHz radio receivers for: 806SL-0180	
001 RE862M 	External two-channel 12 - 24 V AC - DC IP54 receiver for saving up to 50 different user codes, with TOP, TAM, ATOMO D coding.
Accessories for: 806SL-0150 - 806SL-0160	
806SL-0230 	S0002M - External, two-channel, 12 - 24 V AC - DC IP54 control card for keypads.
12 - 24 V AC - DC external modules for: radio-based transponders, keypads and selectors	
806RV-0010  	RBE4024 - Four-channel, external, 24 V AC - DC, IP54 multi-user receiver module for saving up to 3,000 different user codes, for the TOP - TAM - ATOMO D - TWIN series.
12 - 24 V AC - DC external modules for: transponder, keypad and radio-based selectors	
806RV-0020 	RBE4230 - Four-channel, external, multi-user IP54, 120 - 230 V AC for saving up to 3,000 different user codes, for the following series: TOP, TAM, ATOMO D, TWIN.

